



---

## Lexmark C2326

Productivity. Reliability. Security.

---



## Lexmark C2326

Give every small workgroup bold, consistent color output with the compact, lightweight Lexmark C2326. Built for reliability, performance and security, it prints up to 26 ppm\* and offers expandable input for longer print runs. Take control with a 2.8-inch (7.2 cm) touch screen and connect via Wi-Fi, USB, Ethernet, or the cloud.

### Compact color power

- ▶ Get color output at up to 26 pages per minute\*.
- ▶ Tackle your printing workload with the power of a 1-GHz dual-core processor and 512 MB of memory.
- ▶ Compact dimensions of 9.6 inches high x 16.2 inches wide x 15.5 inches deep (243.7 mm high x 411.2 mm wide x 394.1 mm deep) help it fit almost anywhere.



### Connect and command

- ▶ Connect via dual-band Wi-Fi, Gigabit Ethernet, or USB.
- ▶ Simplify mobile printing with the Lexmark Mobile Print app, Mopria®, and AirPrint..
- ▶ Take command of device settings and monitor vital system functions on a 2.8-inch (7.2 cm) color touch screen.
- ▶ Built-in cloud connectors let you securely access files from popular cloud services Box, DropBox, Google Drive, and Microsoft OneDrive.

### Sustained output, enduring quality

- ▶ Genuine Unison™ replacement toner offers up to 6,000/5,500 pages (color/mono)\*\* of rich, vibrant color for more printing and less downtime.
- ▶ Single-piece cartridge simplifies supply replacement for fewer interruptions.
- ▶ Optional input trays increase total input capacity to 751 sheets to support longer print runs and enhanced media flexibility.
- ▶ A steel frame and lifetime imaging components mean long life and minimal maintenance.

### Robust, built-in security

- ▶ Lexmark's full-spectrum security architecture helps keep your information safe—in the document, on the device, over the network, and everywhere in between.


### Save paper, save energy

- ▶ Automatic two-sided printing is standard.
- ▶ Built-in energy-saving modes help support ratings of EPEAT® Silver and ENERGY STAR® certified.
- ▶ The Lexmark Cartridge Collection Program (LCCP) and Lexmark Equipment Collection Program (LECP) minimize waste and support recycling (availability varies by country).

\* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

\*\* Average yield based on approximately 5% print coverage.

# Lexmark C2326

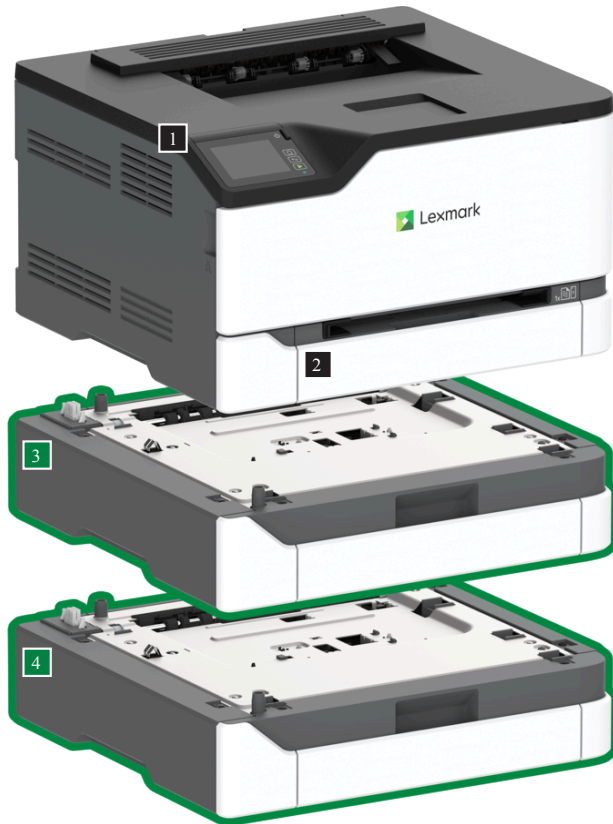

1 Multifunction product with 2.8-inch (7.2 cm) touch screen  
9.6 x 16.2 x 15.5 in.

2 250-Sheet tray  
Dimensions included as part of base model

3 250-Sheet Tray  
4.1 x 16.2 x 15.0 in.  
103.9 x 411.2 x 381.0 mm

4 250-Sheet Tray  
4.1 x 16.2 x 15.0 in.  
103.9 x 411.2 x 381.0 mm

■ Standard

■ Optional

P/N Hardware  
40N9340 Lexmark C2326

P/N Supplies  
20N0W00 Lexmark CS/CX331, 431, C/  
MC3224, 3326, 3426 15K Waste  
Container  
24B7495 Lexmark C/XC2326 Cyan 6K Print  
Cartridge  
24B7496 Lexmark C/XC2326 Magenta 6K  
Print Cartridge  
24B7497 Lexmark C/XC2326 Yellow 6K  
Print Cartridge  
24B7498 Lexmark C/XC2326 Black 5.5K  
Print Cartridge

P/N Paper Handling  
40N4250 250-Sheet Tray

P/N Connectivity  
1021294 USB Cable (2-meter)

P/N Furniture  
40C2300 Adjustable Stand

Average yield based on approximately 5% print coverage.

All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at [http://www.lexmark.com/publications/furniture\\_safety/](http://www.lexmark.com/publications/furniture_safety/)

Product Specifications		Lexmark C2326
<b>Printing</b>		
Display	2.8 inch (7.2 cm) LCD touch panel	
Print Speed	Up to: Black: 26 ppm <sup>1</sup> (Letter) / Color: 26 ppm <sup>1</sup> (Letter)	
Time to First Page	As fast as: Black: 10.9 seconds / Color: 11 seconds	
Print Resolution	Black: 4800 CQ (2400 x 600 dpi) / Color: 4800 CQ (2400 x 600 dpi)	
Memory	Standard: 512 MB / Maximum: 512 MB	
Hard Disk	Not Available	
Recommended Monthly Page Volume	750 - 5000 pages <sup>2</sup>	
Maximum Monthly Duty Cycle	Up to: 75000 pages per month <sup>3</sup>	
<b>Supplies<sup>4</sup></b>		
Laser Cartridge Yields	up to: 6,000 <sup>5</sup> -page Color (CMY) High Yield Cartridges / up to: 5,500 <sup>5</sup> -page Black High Yield Cartridge	
Cartridge(s) Shipping with Product	1,500 <sup>5</sup> -page Black Return Program Toner Cartridge <sup>5</sup> , 1,500 <sup>5</sup> -page Color (CMY) Return Program Toner Cartridges <sup>5</sup>	
<b>Paper Handling</b>		
Included Paper Handling	100-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed, 250-Sheet Input	
Optional Paper Handling	250-Sheet Tray	
Paper Input Capacity	Up to: Standard: 250+1 pages 20 lb or 75 gsm bond / Maximum: 750+1 pages 20 lb or 75 gsm bond	
Paper Output Capacity	Up to: Standard: 100 pages 20 lb or 75 gsm bond / Maximum: 100 pages 20 lb or 75 gsm bond	
Media Types Supported	Paper Labels, Card Stock, Plain Paper, Envelopes, Glossy Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope	
<b>General Information<sup>6</sup></b>		
Standard Ports	802.11ac Wireless, USB 2.0 Specification Hi-Speed Certified (Type B), Ethernet 10/100/1000 BaseTX (RJ-45)	
Noise Level	Operating: 51/53 dBA (Print)	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity / Altitude: 0 - 3048 Meters (10,000 Feet) / Temperature: 10 to 32°C (50 to 90°F)	
Limited Warranty	See Statement of Limited Warranty: 1-Year Onsite Repair, Next Business Day	
Size / Weight	H x W x D: 9.6 x 16.2 x 15.5 in. / 35.5 lb.	
ENERGY STAR Typical Electricity Consumption	TEC: 0.36 kilowatt-hours per week	

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

<sup>1</sup> Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

<sup>2</sup> "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>3</sup> "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>4</sup> Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details. <sup>5</sup> Average yield based on approximately 5% print coverage.

<sup>6</sup> Printers are sold subject to certain license/agreement conditions. See [www.lexmark.com/printerlicense](http://www.lexmark.com/printerlicense) for details.

© 2021 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are registered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT® is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

